YASKAWA

MOTOMAN GP20HL

Handling & General Applications with the GP Series



The MOTOMAN GP20HL is a universally deployable robot with an large reach of 3,124 mm and a maximum payload capacity of 20 kg.

Thanks to the patented vibration control system, this robot has very good positioning accuracy and path performance, and is characterized by almost no oscillation when accelerating and decelerating in the fully extended position.

Typical applications for this robot is handling of very large workpieces, seam sealing, and the application of insulating material in vehicle body production.


The hollow structure of the wrist joint and a number of prepared cable and hose guides in the arm enable optimal routing of the media supply lines (high freedom of motion and long service life).

KEY BENEFITS


- Wide range of potential applications
- Very good path performance
- Large working range: 3,124 mm
- Particularly suitable for large and bulky workpieces
- Hollow arm for optimal media supply



MOTOMAN GP20HL

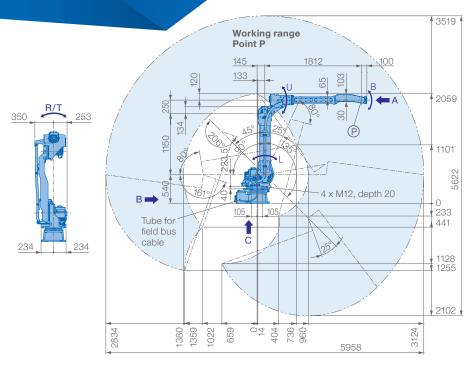




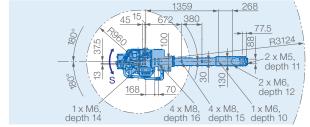


Allowable wrist load

Prevent interaction of the robot with:


- Corrosive gases, liquids or explosive gases
- Exposure to water, oil or dust
- Excessive electrical noise (plasma)

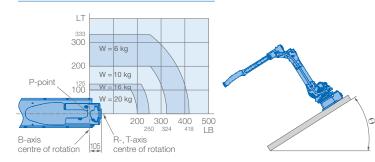


ViewA



ViewB



ViewC



Mounting options: Floor, ceiling, wall, tilt* Protection class: IP54/IP67

* tilt with condition of angle - see table below

Robot installation angle Θ [deg.]	S-axis operating range [deg.]		
$0 \le \Theta \le 30$	±180 degrees or less (no limit)		
$30 < \Theta \le 35$	±60 degrees or less		
$35 < \Theta \leq 45$	±45 degrees or less		
45 < ⊖	±30 degrees or less		

Specifications GP20HL							
Axes	motion range spe	Maximum	speed moment	Allowable moment of inertia [kg · m²]	Controlled axes	6	
		[º/s]			Max. payload [kg]	20	
S	±180	180	-	-	Repeatability [mm]	±0.07	
L	+135/-90	180	-	-	Max. working range R [mm]	3124	
U	+206/-80	180	_	-	Temperature [°C]	0 to +45	
R	±200	400	39.2	1.05	Humidity [%]	20 – 80	
В	±150	430	39.2	1.05	Weight [kg]	560	
Т	±455	630	19.6	0.75	Power supply, average [kVA]	4.0	

Yaskawa Europe GmbH

Robotics Division Yaskawastraße 1 85391 Allershausen Germany Tel. +49 (0) 8166 90-0 robotics@yaskawa.eu www.yaskawa.eu



